

特征/Features	外形尺寸/Outline Dimensions			
<ul style="list-style-type: none"> ◆ GPP芯片 Glass passivated chip ◆ 低反向漏电流 Low Reverse Leakage Current ◆ 高耐浪涌电流能力 High surge current capability ◆ 接线端与壳体间绝缘耐压2500V Case to Terminal Isolation Voltage 2500V 	Case: KBP Series Dimensions in millimeters			序号 Min(mm) MAX(mm)
				A: 11.1 / 11.7 B: 14.2 / 14.8 C: 10.85 / 11.1 D: 8.0 / 8.5 E: 19.0 / 19.6 F: 14.3 / 14.9 G: 0.9 / 1.1 H: 2.8 / 3.2 I: 3.4 / 3.8 J: 3.5 / 3.9 K: 1.15 / 1.35 L: 0.72 / 0.76
机械参数/Mechanical Data				
<ul style="list-style-type: none"> ◆ 本体: 塑封 Case: plastic package ◆ 标识/极性: 本体标记 Marking / Polarity: Marked on Body ◆ 重量: 约克 Weight: About 1.5grams 				

极限值/Maximum Ratings and Thermal Characteristics @ Ta = 25°C unless otherwise noted

符号 Symbol	特性 Characteristic	KBP3							单位 Unit
		005	01	02	04	06	08	10	
V _{RRM}	最大反向重复峰值电压 Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
I _{F(AV)}	平均整流输出电流 Average Forward Output Rectified Current@Ta=120°C	3							A
V _F	正向峰值电压 Forward Voltage Per Leg @I _{FM} =3.0A	1.0							V
I _{FSM}	正向浪涌电流 Peak Forward Surge Current 8.3ms Single Half Sine-wave superimposed on rated load	80							A
I _R	反向漏电流 Maximum DC reverse current at rated DC blocking voltage per leg	5 500							uA
i ² t	热容值 Rating for fusing (t<8.3ms)	26							A ² S
V _{isol}	绝缘耐压 Rms isolation voltage from case to leads	2500							V
C _J	典型结电容 Typical Junction Capacitance	23							pF
R _{θJC}	热阻 Maximum thermal resistance per leg	10							°C/W
T _j , T _{STG}	结温, 存储条件 Operating Junction and storage temperature range	-55~150							°C

Note:
 (1) Junction to case with heatsink
 (2) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw .

◆ 特性曲线 (典型) Characteristics(Typical)

Fig 1-forwardCurrent derating Curve
图1正向电流降额曲线

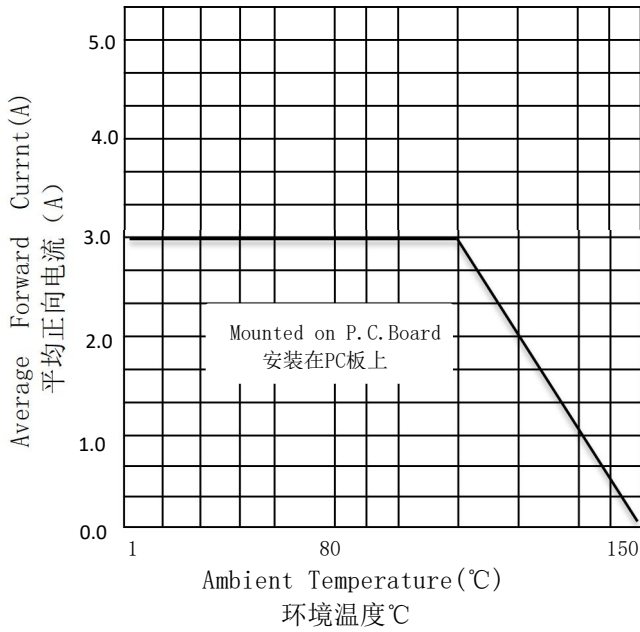


Fig. 2-Maximum Non-Repetitive Surge Curr
图2 最大不重复正向浪涌曲线

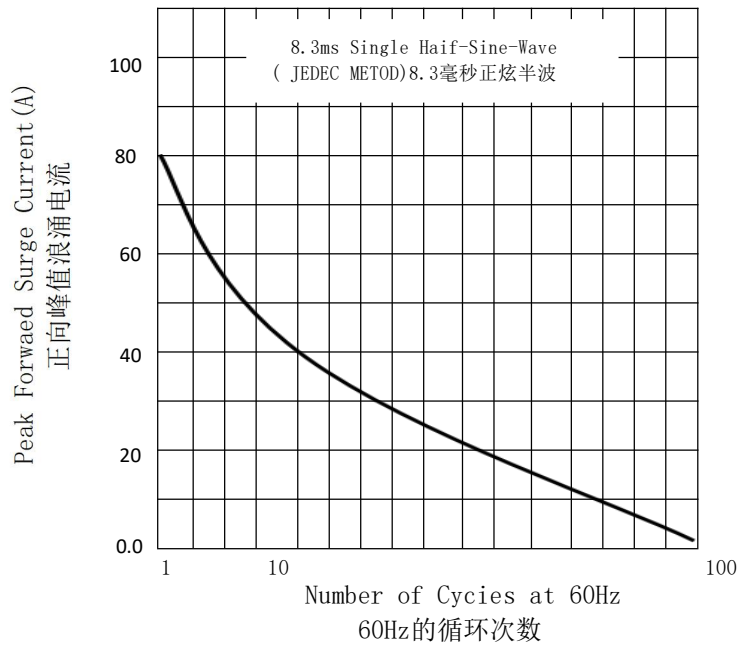


Fig. 3-Typical Reverse Characteristics
图3. 典型的反向特性

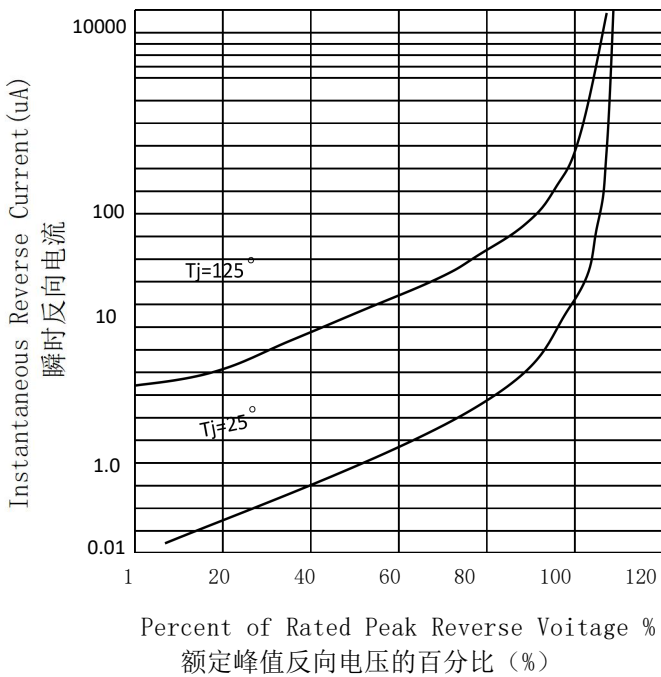


Fig. 4-Typical Forwaed Characteristics
图4. 典型的正向特性

